


## Couple Doors – Special – EI120

Thickness = 100mm/125mm (each door)

- **SUBFRAME:** Galvanized steel tubular
- Hermetic sealing between frame and sub-frame, addicted with rockwool
- **FRAME:** realized with strong folded metal sheets on drawing
- **Door pannels:** composed by inside insulated frame with antivibration materials, insulation pack realized with high absorption materials.
- **External parts:** steel sheets, thickness 30/10-20/10-15/10 fixed with sound insulation technology
- **Painting:** various color of RAL
- High resistance steel hinges
- Seals applied on the entire frame master
- Anti-panic pull handles
- solid grappling hook translating between the two doors
- **Fire resistant : EI120**

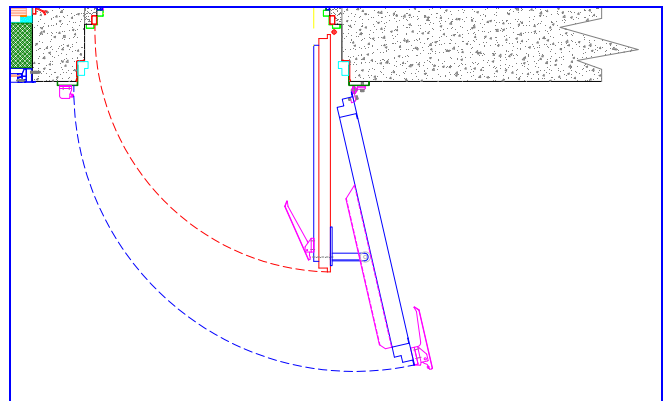

**R'w = 60dB**

**TESTED DIRECTLY IN WORK!**

